
Product Information

SEZ-M R410A Ceiling Concealed Ducted System Inverter Heat Pump

Making a World of Difference

Mr.SUM.



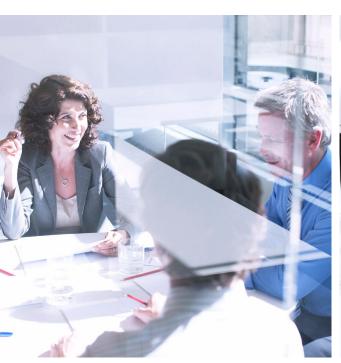



Designed for offices, restaurants and shops, the **SEZ-M** series operates at low noise levels. Its low unit height and lightweight design also help to make installation easier and more convenient.

Key Features

- Compact ceiling concealed ducted unit with an unobtrusive design
- Low Static Pressure Level resulting in noise reduction
- Low Unit Height minimal intrusion into occupied space





Product Information

Air Conditioning

SEZ-M R410A Ceiling Concealed Ducted System

Inverter Heat Pump

Making a World of Difference










SEZ-M-DA - INDOOR UNITS		SEZ-M25DA	SEZ-M35DA	SEZ-M50DA	SEZ-M60DA	SEZ-M71DA	
CAPACITY (kW)	Heating (nominal) Cooling (nominal) Heating (UK)	2.9 (1.3-4.5) 2.5 (1.5-3.2) 2.44 (1.09-3.79)	4.2 (1.7-5.0) 3.5 (1.4-3.9) 3.53 (1.43-4.20)	6.4 (1.7-7.2) 5.1 (2.3-5.6) 5.38 (1.43-6.05)	7.4 (2.5-8.0) 5.6 (2.3-6.3) 6.21 (2.10-6.71)	8.1 (2.6-10.4) 7.1 (2.8-8.3) 6.80 (2.18-8.73)	
	Cooling (UK)	2.45 (1.47-3.14)	3.43 (1.37-3.82)	4.99 (2.25-5.48)	5.49 (2.25-6.18)	6.95 (2.74-8.12)	
SHF (nominal)		0.80	0.78	0.78	0.79	0.74	
COP / EER (nominal)		3.61 / 3.42	3.72 / 3.47	3.56 / 3.23	3.36 / 3.22	3.57 / 3.21	
SCOP / SEER (BS EN14825)		3.8 / 5.3	4.0 / 5.7	3.9 / 5.8	4.1 / 5.3	3.8 / 5.3	
P ENERGY EFFICIENCY CLASS Heating/Cooling		A/A	A+ / A+	A / A+	A+ / A	A/A	
IRFLOW (I/s)	Lo-Mi-Hi	100-117-150	117-150-183	167-217-250	200-250-300	200-267-333	
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")	15.88 (5/8")	15.88 (5/8")	
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	
EXTERNAL STATIC PRESSURE (Pa)		5-15-35-50	5-15-35-50 5-15-35-50		5-15-35-50	5-15-35-50	
SOUND PRESSURE LEVEL (dBA) Lo-Mi-Hi		22-25-29	23-28-33	29-33-36	29-33-37	29-34-39	
SOUND POWER LEVEL (dBA)		50	53	57 58		60	
IMENSIONS (mm)	Width x Depth x Height	790 x 700 x 200	990 x 700 x 200	990 x 700 x 200	1190 x 700 x 200	1190 x 700 x 200	
VEIGHT (kg)		18	21	23	27	27	
LECTRICAL SUPPLY		Fed by Outdoor Unit					
USE RATING (BS88) - HRC (A)		6	6	6 6		6	
TERCONNECTING CABLE No. Cores		4	4	4 4		4	
WIRED REMOTE CONTROLLER REFERENCE		PAR-33MAA	PAR-33MAA PAR-33MAA PAR-33MA		PAR-33MAA	PAR-33MAA	


SUZ-KA-VA6 - OUTDOOR UNITS		SUZ-KA25VA6	SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6	
SOUND PRESSURE LEVEL (dBA) Heating/Cooling		48 / 47	50 / 49	52 / 52	55 / 55	55 / 55	
SOUND POWER LEVEL (dBA) Heating/Cooling		58	62	65	65	69	
WEIGHT (kg)		30	35	54	50	53	
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550	800 x 285 x 550	840 x 330 x 880	840 x 330 x 880	840 x 330 x 880	
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	
PHASE		Single	Single	Single	Single	Single	
SYSTEM POWER	Heating/Cooling (nominal)	0.80 / 0.73	1.13 / 1.01	1.80 / 1.58	2.20 / 1.74	2.27 / 2.21	
INPUT (kW)	Heating/Cooling (UK)	0.69 / 0.61	0.97 / 0.85	1.55 / 1.33	1.89 / 1.46	1.95 / 1.86	
TARTING CURRENT (A)		3.8	5.2	8.2 9.8		10.5	
SYSTEM RUNNING CU	JRRENT (A) Heating/Cooling [MAX]	3.50 / 3.80 [7.4]	4.80 / 5.20 [8.7]	7.40 / 8.20 [12.7]	7.70 / 9.80 [14.7]	10.5 / 9.7 [17]	
FUSE RATING (BS88) - HRC (A)		10	10	20	20	20	
MAINS CABLE No. Cores		3	3	3	3	3	
MAX PIPE LENGTH (m)		20	20	30	30	30	
MAX HEIGHT DIFFERENCE (m)		12	12	30	30 30		
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) R410A (GWP 2088) - 7m		0.80 / 1.67	1.15 / 2.40	1.60 / 3.34 1.60 / 3.34		1.80 / 3.76	
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) R410A (GWP 2088)		0.39 / 0.81	0.39 / 0.81	0.46 / 0.96	0.46 / 0.96	1.265 / 2.64	


PRODUCT DIMENSIONS

SEZ-M25/35/50/60/71DA







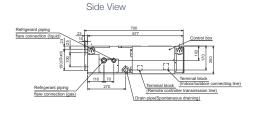

Model	A	В	С	D	E	F	G	Н	J	K	L
SEZ-M25DA	700	752	798	660	7	600	800	660	5	500	16
SEZ-M35DA	900	952	998	860	9	800	1000	860	7	700	20
SEZ-M50DA											
SEZ-M60DA	1100	1152	1198	1060	11	1000	1200	1060	9	900	24
SEZ-M71DA											



Telephone: 01707 282880 email: air.conditioning@meuk.mee.com web: airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation especific conditions. Missuish Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A, PWP-2088, R24 (GWP-1976), R407C (GWP-1774) or R154a (GWP-1403). These GWP ere based on Pagicalation (EU, No S170A) of the ordinary of the











Mitsubishi Electric UK's commitment to the environment



Follow us @meuk_les Follow us @green_gateway



Mitsubishi Electric Living Environmental Systems UK



mitsubishielectric2



thehub.mitsubishielectric.co.uk